

Datasheet ValkAce+ - Slate roof hook

Technical specifications

- Mounting system for pitched roofs with slate tiles by screw fixing on impregnated construction wood attached to the roof's battens or rafters.
- Roof hooks can be used for horizontal and vertical profile mounting (portrait / landscape).
- Roof hook made of stainless steel.
- Roof hook coupling manufactured in steel with zinc magnesium coating featuring a high-quality plastic installation help.
- To be used in combination with SpeedFlash as a replacement for original slate pan for a watertight finish.

Requirements SpeedFlash

- Speedflash (Base + Cap) – 747775
- Speedflash mounting material – 747776

One-off purchase to protect underlying slate tiles:
SpeedFlash shield – 747779.

Technical specifications SpeedFlash

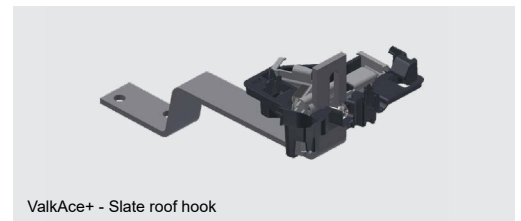
- Material polypropylene, with an addition of UV and temperature resistant material which ensures a minimum lifespan of 20 years.
- UV resistant
- Flame retardant
- Does not become brittle during frost periods

Key benefits ValkAce+ - Slate roof hook and SpeedFlash

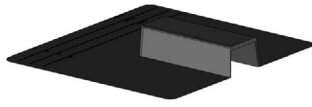

- Complete solution for PV systems on slate roofs.
- Easy to use with ValkAce profiles and ValkGrip panel clamps.

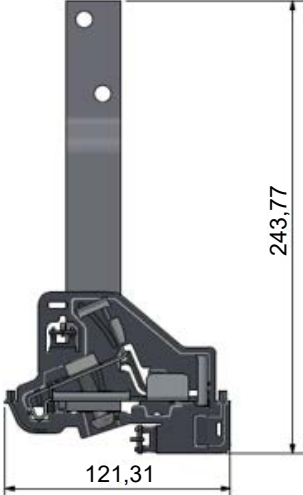
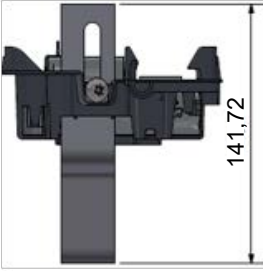
Article information

Material no.	747511
Description	ValkAce+ - Slate tile roof hook
GTIN code	08721586860070
Image	
Weight (kg)	0,52
Pcs. per packaging	#N/B



Datasheet ValkAce+ - Slate roof hook

Material no.	747775	747776
Description	Speedflash - Slate roof hook	Speedflash - mounting material
GTIN code	08719632528715	08719632528722
Image		
Weight (kg)	0,246 Kg per pc	0,430 Kg per pc
Pcs. per packaging	20 pcs	20 pcs

Dimensions (mm)	
	

Technical specifications ValkAce+

- Standard profile lengths ideal for panels 1134 mm wide.
- ValkGrip suitable for panel heights of 30 and 35 mm.
- Space between panels 14 mm.

Key benefits ValkAce+

- Direct, slip-resistant panel fixation in a single movement using the ValkGrip module clamp.
- Enables safer and more ergonomic working without leaning over the panel.
- One universal clamp for both mid and side positions, ensuring a clean and consistent finish.
- Super-fast installation due to easy clip-on panel clamps and slide-in coupling and only one required tool (T30).
- Robust and future-proof system with a minimal number of components logistics.
- Automatic electrical connection of metal parts and panels.
- Clip-on cable management and earth terminal.

Calculations

Projects using the ValkAce+ - Slate roof hook can be calculated easily and according to regionally applicable standards using the [ValkPVplannerPro](#).