

Datasheet ValkAce+ - Strongline roof hook


Technical specifications

- Strong roof hook for PV systems installed on pitched roofs with tiles.
- 3-way adjustability in height and width
 - Top 38-51mm – adjustability of 13mm.
 - Bottom 176-189 – adjustability of 13mm.
 - Width minus and plus 50 mm.
- Roof hooks to be used for horizontal and vertical profile mounting (portrait / landscape).
- Roof hook manufactured in stainless steel.
- Roof hook coupling manufactured in steel with zinc magnesium coating featuring a high-quality plastic installation help.


Key benefits ValkAce+ - Strongline roof hook


- High flexibility. Top, bottom and width can be adjusted for perfect outlining.
- Easy to use with ValkAce profiles and ValkGrip panel clamps.

Article information


Materiaal no.	747507
Description	ValkAce+ - Strongline roof hook
GTIN code	08721586860032
Image	
Weight (kg)	0,9
Pcs. per packaging	#N/B

Dimensions (l x w x h) (mm)

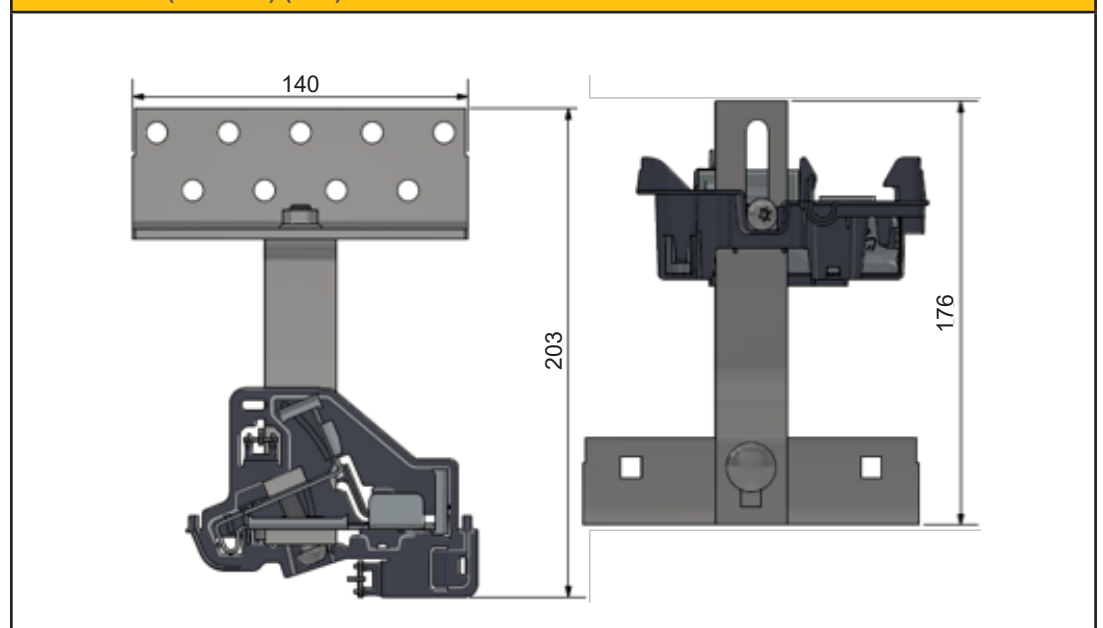

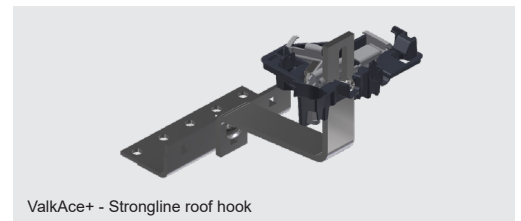

Datasheet ValkAce+ - Strongline roof hook

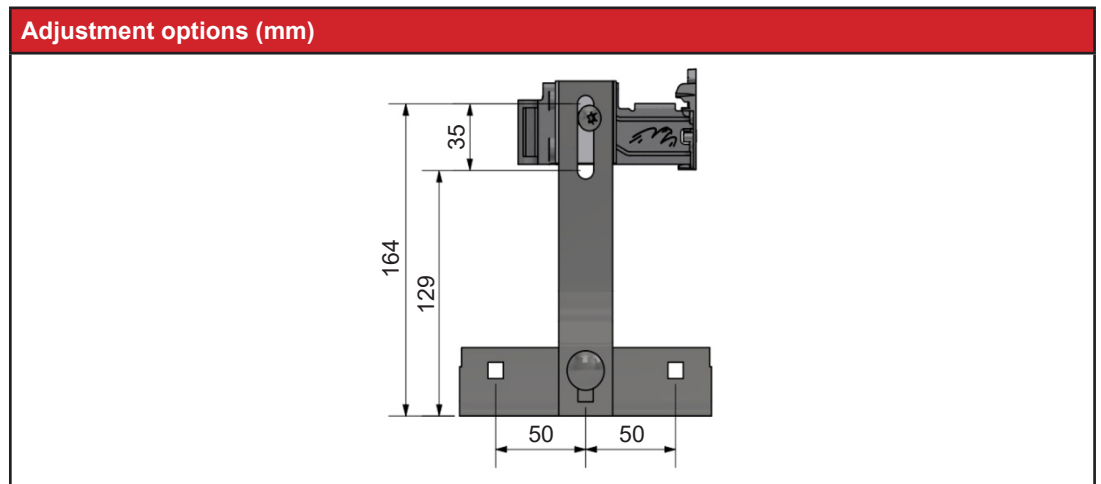

Technical specifications ValkAce+

- Standard profile lengths ideal for panels 1134 mm wide.
- ValkGrip available for panel heights of 30 and 35 mm.
- Space between panels 14 mm.

Key benefits ValkAce+

- Direct, slip-resistant panel fixation in a single movement using the ValkGrip module clamp.
- Enables safer and more ergonomic working without leaning over the panel.
- One universal clamp for both mid and side positions, ensuring a clean and consistent finish.
- Super-fast installation due to easy clip-on panel clamps and slide-in coupling and only one required tool (T30).
- Robust and future-proof system with a minimal number of components logistics.
- Automatic electrical connection of metal parts and panels.
- Clip-on cable management and earth terminal.

Calculations

Projects using the ValkAce+ - Strongline roof hook can be calculated easily and according to regionally applicable standards using the [ValkPVplannerPro](#).